


STANDARD DOORS

WITH ALUMINIUM FRAME

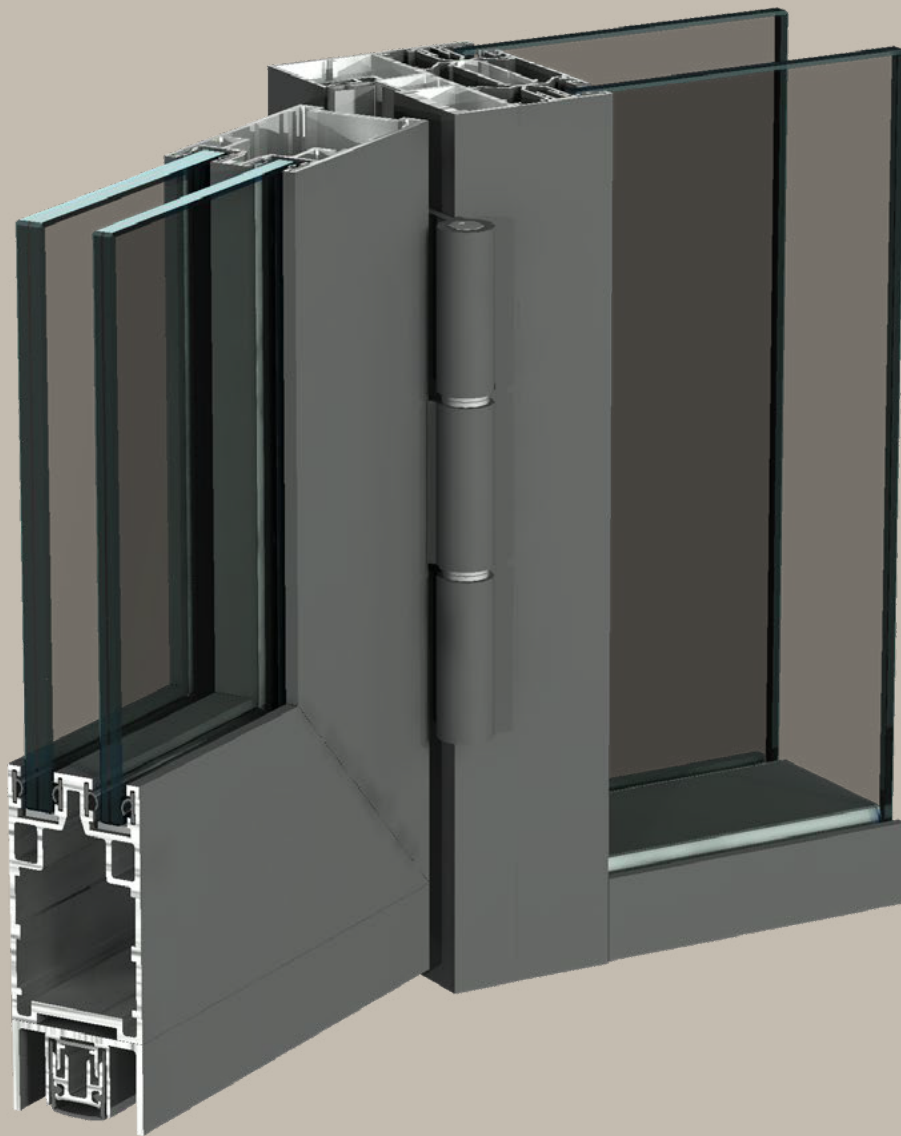

STANDARD DOORS

with aluminium frame

Single- or double-glazed STANDARD doors with aluminium frame. There is an option to install a door closer and access control system. Aluminium frame 53 mm, 55 mm thick, 78 mm, 100 mm. There is an option to install the door in both a glass wall and a gypsum wall.

Glazing	Acoustic insulation Rw
VSG 44.2	34 dB
VSG 55.1	35 dB
VSG 66.2Si	37 dB
VSG 33.2 + VSG 33.2	36 dB
VSG 44.2 + VSG 33.2	38 dB
VSG 66.2Si + Acoustic insert	40 dB

Single or double leaf doors

Maximum leaf height 3,000 mm

Door leaf thickness 40 mm

Option to add smoke protection

Declared acoustic insulation 34 ÷ 40 dB

Frame profiles and hinges painted in any colour from the RAL palette

Handle in stainless steel finish as standard, door closer in silver anode finish (can be painted in any RAL colour)

Translucent/frosted/tinted/smoked/LCD glass

Stick-on decorative muntins for single glazing

Structural muntins for double glazing

Optional fittings: Access control (electric strike, magnetic strike), external or concealed door closer

External or concealed hinges

Concealed drop down seals

Option of installing blinds

Option of installing sidelights and fanlights above the door frame