


CLASSIC FS DOORS

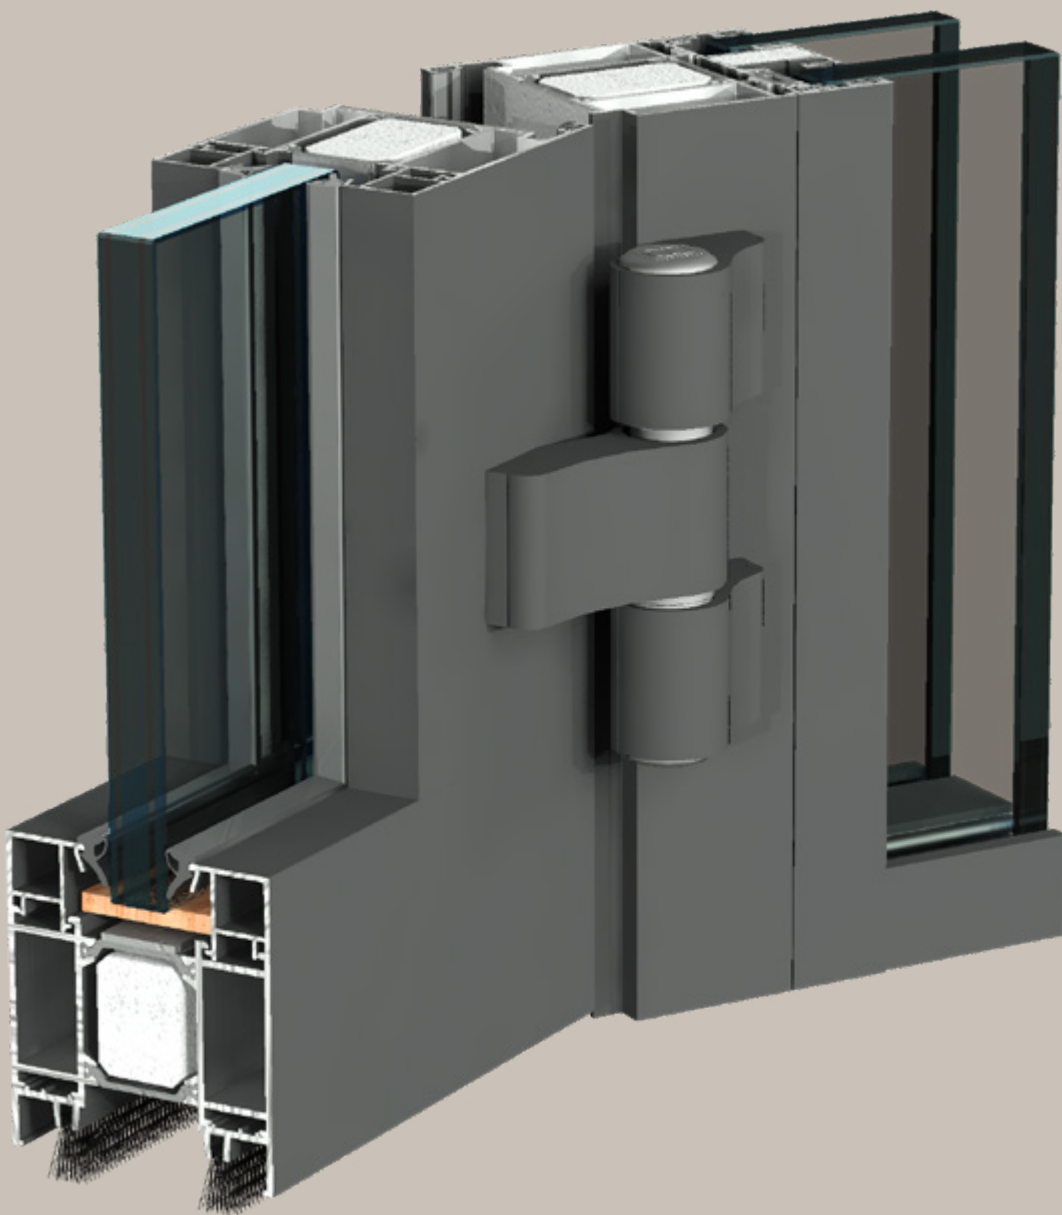

CLASSIC FS DOOR

The Classic FS fireproof door is a single or double leaf solution. Filled with AGC Pyrobel 16 (P16), Vetrotech Contraflam 30 or Reglas Pyrobat 15 glazing, their fire rating is EI30/EW30. The leaf width is up to 1,414 mm for the single leaf model and up to 1,114 mm (per leaf) for the double leaf model. There is an option to install an overhead door closer and access control system. The system's width is 78.2 mm. Aluminium frame depth: 70 mm. The door can be installed in any assembly opening.

Glazing	Acoustic insulation Rw
AGC Pyrobel 16	41dB

Single or double doors

Maximum leaf size: 1,114 mm x 2,720 mm

Door frame profiles painted in any RAL colour

Fittings in silver anodised finish as standard; can optionally be painted in any RAL colour.

Glazing options: AGC Pyrobel 16 (P16), Vetrotech Contraflam 30 or Reglas Pyrobat 15 (with EI30/EW30 fire rating)

Optional fittings: access control (electric strike, magnetic strike), overhead door closer, single and three-point locks, air actuators

External hinges