


FLUSH DOORS

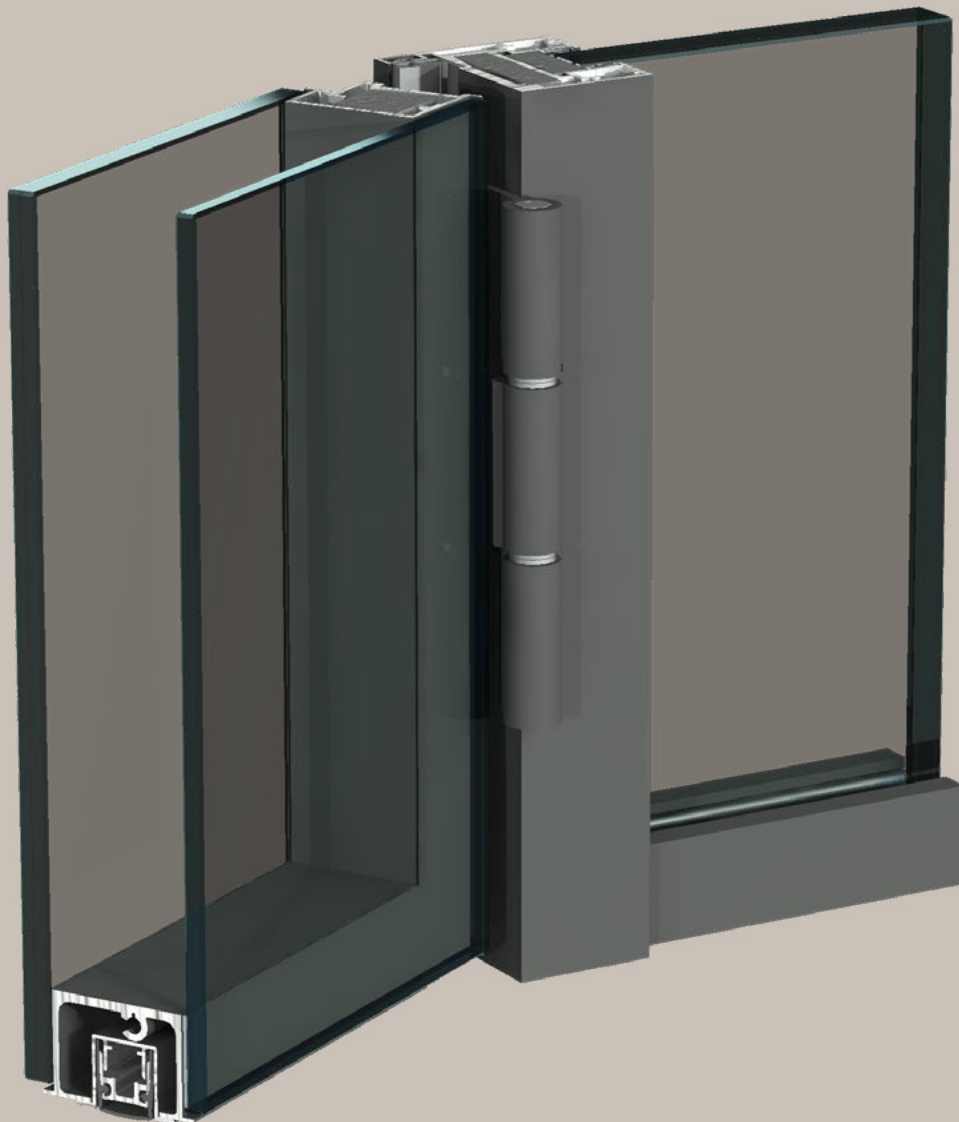

FLUSH DOORS

Flush doors are made of toughened or laminated glass with thickness of 6 mm or 8 mm. The door has a concealed frame, to which glass is bonded on both sides. There is an option to install a door closer with a guide rail and access control system. Aluminium frame 53 mm, 78 mm and 100 mm thick. The door can be installed in any assembly opening, also in a glass wall system.

Glazing	Acoustic insulation Rw
ESG 6 + ESG 6	36 dB
ESG 6 coated, infill, ESG 6 coated (opaque door)	41 dB
VSG 44.2 + ESG 6 + Acoustic insert	43 dB

Single or double leaf doors

Maximum leaf height 3,000 mm

Leaf thickness 53 mm

Declared acoustic insulation 36 ÷ 43 dB

Frame profiles and hinges painted in any colour from the RAL palette

Handle in stainless steel finish as standard, door closer in silver anode finish
(can be painted in any RAL colour)

Optional fittings: access control (electric strike, magnetic strike), external door closer

Option to add smoke protection

External hinges

Concealed drop down seals

Option of installing blinds

Option of installing sidelights and fanlights above the door frame